

Storage Accelerator Boards

STORAGE ACCELERATOR BOARDS

	Throughput (Gbps)	Form Factor
MxL8807	200	OCP, PCIe
MxL8805	100	OCP, PCIe
MxL8803	50	OCP, PCIe

MARKET REQUIREMENTS

- Faster dataset delivery
- High-performance analytics
- Improved workload accuracy
- Quicker access to larger dataset
- Simple accesses to all dataset levels
- Power data from edge to cloud

PANTHER III PROVIDES

- Fastest response times
- Highest data reduction ratios
- Data temperature transitioning
- Enhanced deduplication hit rates
- Single pass compression / encryption / MaxHash / data protection / RTV
- Complete NSA Suite B Security
- End-to-end data protection
- Real-time verification (RTV)
- Software backup on all operations
- Six 9's Reliability

APPLICATIONS

- Enterprise / hyperscale data center
- Hyperconverged infrastructure
- Converged infrastructure
- Primary storage
- Un/structured storage
- Digital library media
- Block / file / object storage
- Software-defined storage (SDS)
- All-flash / hybrid storage
- NVMe SSD storage arrays

Delivers Ultra-Low Latency & Breakthrough Data Reduction



The Need for Data


Around the world, there is an ever-increasing demand to securely store larger amounts of data. Additionally, everyone wants instant access to their data. Today's data storage solutions face the challenge of meeting these demands while increasing workload result accuracy, lowering capital expenditures, and improving reliability.

The Panther III Solution

Panther III addresses these challenges and more by delivering simultaneous breakthrough data reduction, encryption, data protection, and enhanced deduplication enablement with MaxHash. With Panther, storage solutions offer 12:1 data reduction, a full suite of security, and CAPEX cost reduction while providing ultra-reliable data protection.

Panther Accelerator powerful data reduction technology intelligently offloads the CPU by providing multiple independent parallel data processing unit transform engines. Panther opens all tiers of storage, including All-Flash-Array and NVMe, to their full bandwidth potential with no CPU or software limitations.

Panther III vs. Software (Direct CPU Core) Compression

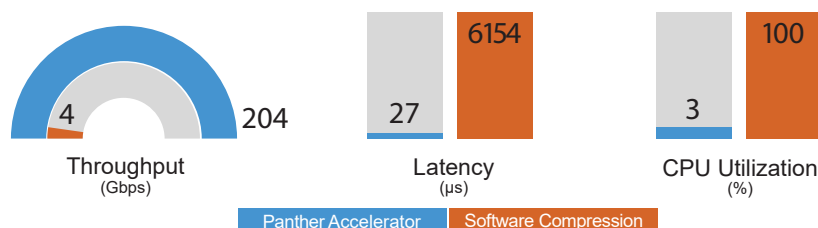

Packet Size 32KB: XP10 Encode, Padding, AES-CBC Encryption



Decompression/Compression Algorithms

- GZIP Level 9
- ZLIB Level 9
- Deflate Level 9
- XP10 Level 6
- LZS/eLZS

Suite B Secret & Top Secret NIST Certified Decryption/Encryption

- AES-CBC, -GCM, -CTR, -ECB (128, 192, or 256 bit keys)
- AES-XTS (256 or 512 bit)

Authentication and Deduplication MaxHash

- SHA-1 (160)
- SHA-2 (224/256/384/512)
- HMAC-SHA-1, HMAC-SHA-2
- AES-GMAC, AES-XCBC-MAC

Optimized Acceleration Architecture

Panther is an ideal solution for larger datasets (big data) and fast dataset applications like data warehouse and big table. Its flexible compression algorithms enable simple data temperature transition, optimizing access latency for hot, warm, and cold data. When combined with Panther Class of Service, traffic handling can be prioritized for provisioning, enforcing service agreements or ultrafast access to hot data reads.


Panther lowers capital storage costs by delivering both improved storage capacity and \$/GB savings. In addition, its single pass execution provides faster dataset delivery enabling high performance analytics with improved workload results. It also offers built-in, end-to-end real-time verification (RTV) of all transforms, assuring data integrity and eliminating data loss.

Rich Software Ecosystem Packages

MaxLinear provides a feature-rich software development kit (SDK) containing API, drivers, and source code for easy incorporation with end-application software and software-defined storage (SDS). They are focused on intelligent CPU offloading, reduced overhead for lowest latency, and full-feature failover for highest system reliability and zero down time.



- Linux: Multi Distributions & Kernel versions
- FreeBSD 12.x / 13.x
- Provide source code for easy incorporation
- Plug & Play packages - No modification required
- Enhanced latency and throughput
- Backward compatibility

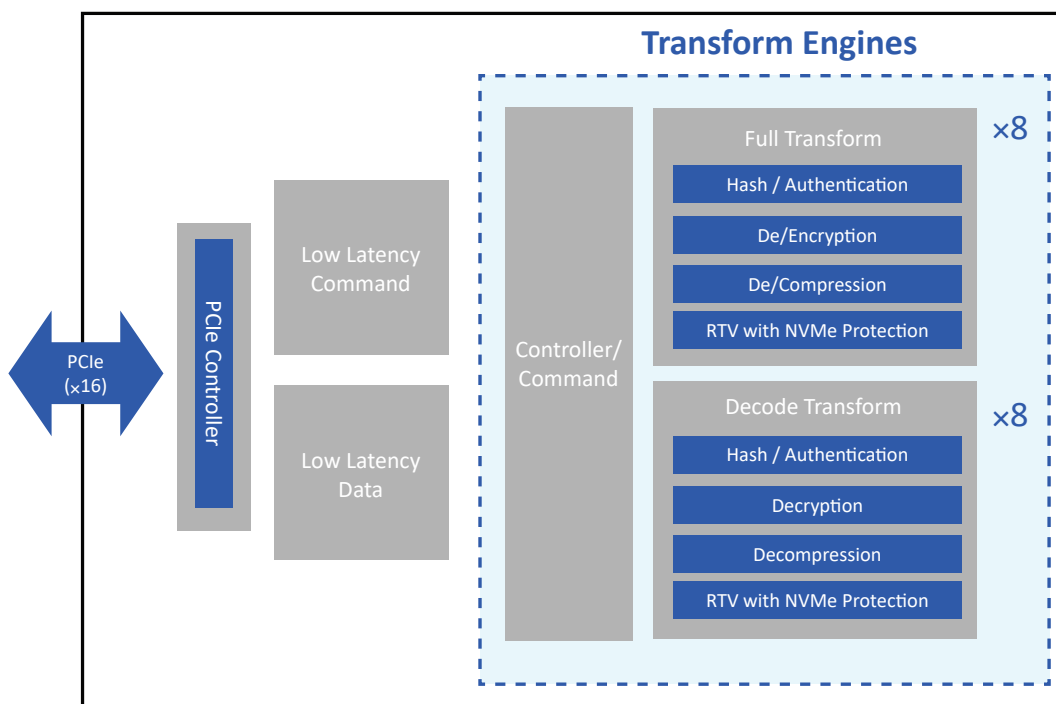

Panther III Block Diagram

Panther III Series

Panther III Unleashes the True Power of Data Storage

Panther delivers ultra-low latency, 200Gbps throughput, data reduction, and security acceleration for enterprise and hyperscale data centers and results in unprecedented performance, scalability, high availability, resiliency, and capacity optimization.

- **Accelerate the Speed of Storage:** Panther delivers simultaneous breakthrough compression performance and security capability that enables 12:1 data compression allowing storage solutions to not only store 1/12th the data, but also allow users to access, process, and transfer data 12 times faster.
- **Enable Intelligent Storage:** Panther's 200Gbps throughput and ultra-low latency enable quicker access to big data, allowing higher performance data analysis to deliver better workload accuracy.
- **Lower Capital Storage Expenses (CAPEX):** The exclusive MaxHash provides independent hash block size and programmable offset to enhance deduplication hit rates resulting in improved effective storage capacity and \$/GB savings.
- **Integrate Faster:** Feature-rich software development kit (SDK) contains API, drivers, and source code for easy incorporation with end application software and software-defined storage (SDS).
- **Meet Six 9's Reliability:** Built-in, end-to-end data protection, real-time verification (RTV) of all transforms, NVMe protection, and in-line CRCs/parity assure data integrity and eliminate data loss.

Meet **Six 9's** Reliability
Integrate Faster
Lower CAPEX
Accelerate the Speed of Storage
Enable **Intelligent** Storage

Panther III Storage Accelerator Boards

Part Number	Interface	Throughput (Gbps)	Max Cascaded Throughput (Gbps)	Compression	Encryption	Authentication / Hash	Data Protection	Form Factor
MXL8807B-CA-B	PCIe Gen4 x16	200	3,200	■ Gzip ■ zlib ■ Deflate ■ XP10 ■ eLZS/LZS	AES Suite B	■ SHA-1/2 ■ HMAC-SHA ■ AES-GMAC, AES-XCBC-MAC	■ NVMe-DP ■ T10-DIF ■ T10-DIX	PCIe HHHH
MXL8805B-CA-B	PCIe Gen4 x8 / Gen3 x16	100	1,600					OCP NIC 3.0 Ver 1.1 SFF
MXL8803B-CA-B	PCIe Gen3 x8	50	800					
MXL8807B-EA-B	PCIe Gen4 x16	200	3,200					
MXL8805B-EA-B	PCIe Gen4 x8 / Gen3 x16	100	1,600					
MXL8803B-EA-B	PCIe Gen3 x8	50	800					



MaxLinear, Inc.
5966 La Place Court, Suite 100
Carlsbad, CA 92008
Tel.: +1 (760) 692-0711
Fax: +1 (760) 444-8598
www.maxlinear.com

The content of this document is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by MaxLinear, Inc. MaxLinear, Inc. assumes no responsibility or liability for any errors or inaccuracies that may appear in the informational content contained in this document.

Reproduction, in part or whole, without the prior written consent of MaxLinear, Inc. is prohibited. MaxLinear, the MaxLinear logo, and any other MaxLinear trademarks (including but not limited to MxL, Full-Spectrum Capture, FSC, AirPHY, Puma, AnyWAN, VectorBoost, MXL WARE, and Panther) are all property of MaxLinear, Inc. or one of MaxLinear's subsidiaries in the U.S.A. and other countries. All rights reserved. All third-party marks and logos are trademarks™ or registered® trademarks of their respective holders/owners.

© 2025 MaxLinear, Inc. All rights reserved.